ASSEMBLY INSTRUCTION
SKU# 930237

Note: Please consult a qualified electrician if you are not certain of the installation

CAUTION: Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

1. Thread the mounting screws into the mounting strap. Attach the mounting strap by tightening the outlet box screws securely into the outlet box.
2. Connect wire with white to white and black to black, cover the connections by using the wire connectors provided. Tie the ground wire from outlet box and from fixture to the ground screw on the mounting strap.
3. Install bulbs. (not included).
4. Carefully tuck all wiring back into outlet box. Thread the mounting screws into the appropriate threaded holes in the mounting strap. Locate the ceiling pan over the outlet box, positioning the mounting screw heads through the large opening of keyhole slots. Rotate the ceiling pan to seat the mounting screws and tighten securely.
5. Place the glass shade over the ceiling pan and twist until the glass shade lock firmly to the ceiling pan.
6. Turn on the power.

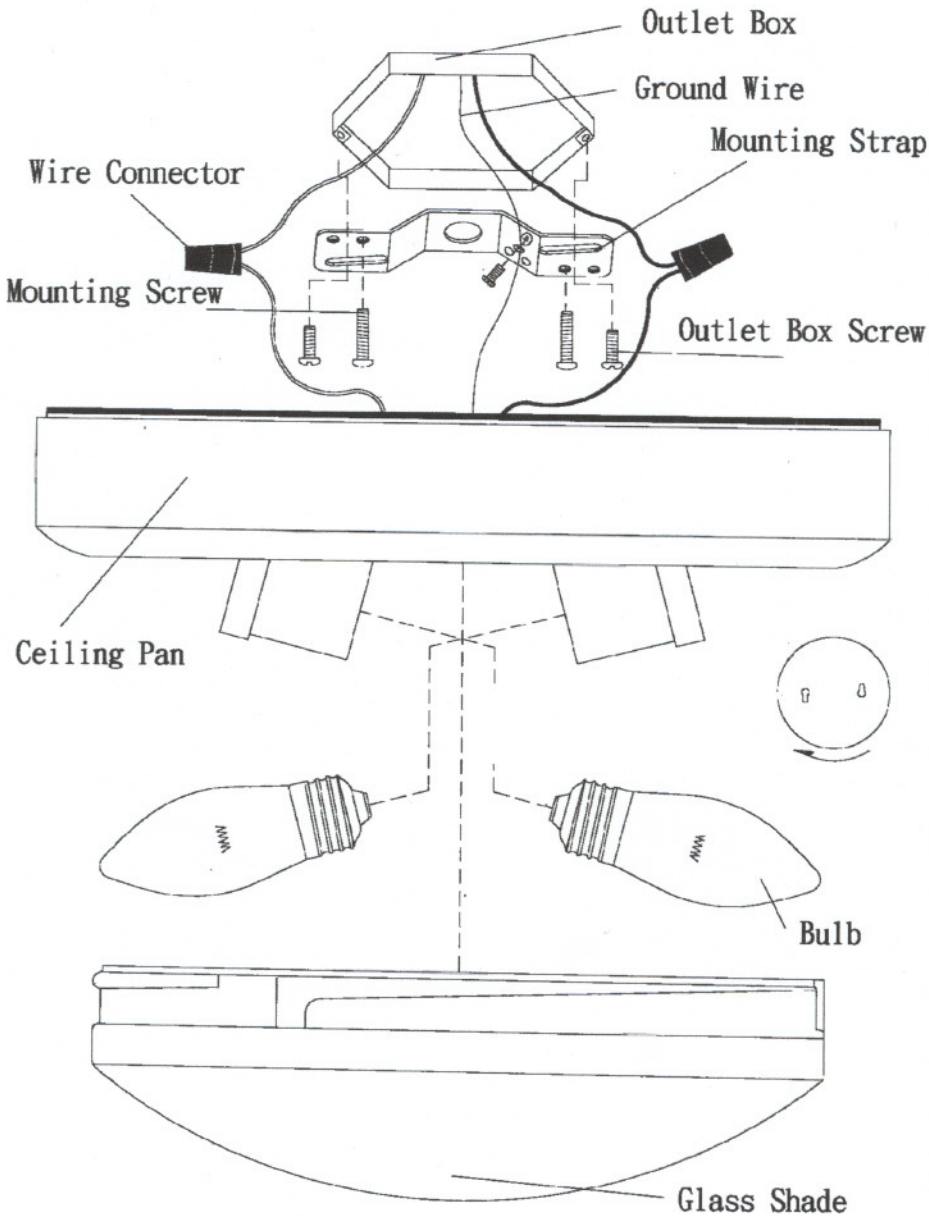

INSTRUCCION DE ASAMBLEA

SKU# 930237

NOTE: Por favor, consulte con un electricista calificado de que no este seguro de la instalación.

CAUCION: Antes de comenzar la instalación ,cortar la electricidad mediante mediante apagar el cortacircuitos o quitar el fusible desde la caja de fusible .

1. Asegurese que la rosca de los tornillos esta enfrentando hacia abajo cuando travesano esta enganchando a la caja de salida. Fijar la correa de montura con los tornillos de la caja de salida provistos.
2. Conectar los cables balnco con blanco y Negro con Negro ,cubrir las conexiones usando los connectors de cables provistos.Ajustar el cable de tierra desde la caja de salida y desde el aparato al tornillo de cable de tierra que esta en el travesano
3. Instalal la bombillas. (no incluidás).
4. Cuidadosamenteremeter todos los bables a la caja de salida. Localizar el platillo del aparato encima de la caja de salida, colocar las cabezas del tornillo del aparato a través de las aberturas mas grandes de los agujeros ranurados. Girarel platillo del aparato a asentar a los tornillos y aparetar sguramente.
5. Instalar la pantaila de cristal y la placa metallca al tubo pasando el tubo por el centro de la pantalla de cristal.
6. Encienda la corriente.